


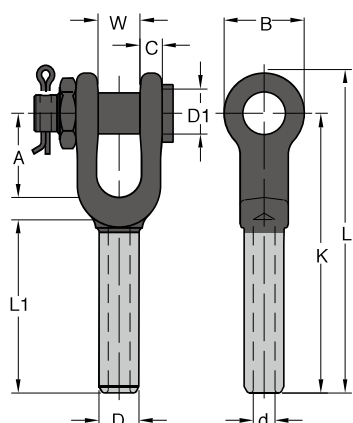

- YOKE 8-730 Opened Swage Sockets are forged from special bar quality carbon steel with very finest hardness controlled by spheroidize annealing.
- YOKE Swage Sockets properly applied have an efficiency rating of 100% based on the catalog strength of wire rope.
- YOKE Swage Sockets are recommended for use with 6x19, 6x37, and IWRC wire rope. They are approved for use with galvanized bridge rope.
- YOKE Swage Sockets are not recommended for use on fiber core or lang lay rope.

All slings swaged with sockets shall be proof loaded in accordance with ASME B30.9

Forged Open Swage Wire Rope Socket

with Safety Bolt Pin

Item No.		Rope Size	Before Swage Dimensions (inch)										Max. After Swage Dim.	N.W.
S.C.*	Galvanized		inch	A	B	C	D	D1	d	K	L	L1		
8-730-06	8-730-06G	1/4	1.50	1.38	0.35	0.50	0.67	0.27	4.02	4.80	2.17	0.67	0.46	0.7
8-730-08	8-730-08G	5/16	1.77	1.65	0.47	0.77	0.79	0.34	5.31	6.26	3.15	0.79	0.71	1.3
8-730-10	8-730-10G	3/8	1.77	1.65	0.47	0.77	0.79	0.41	5.31	6.26	3.15	0.79	0.71	1.5
8-730-11	8-730-11G	7/16	1.96	2.00	0.55	0.98	0.98	0.48	6.85	7.83	4.33	1.00	0.91	2.4
8-730-13	8-730-13G	1/2	1.96	2.00	0.55	0.98	1.19	0.55	6.85	7.83	4.33	1.00	0.91	2.4
8-730-14	8-730-14G	9/16	2.25	2.36	0.68	1.25	1.19	0.62	8.27	9.45	5.31	1.22	1.16	5.3
8-730-16	8-730-16G	5/8	2.25	2.36	0.68	1.25	1.19	0.67	8.27	9.45	5.31	1.22	1.16	5.1
8-730-19	8-730-19G	3/4	2.75	2.75	0.79	1.55	1.38	0.82	10.07	11.61	6.34	1.50	1.42	8.8
8-730-22	8-730-22G	7/8	3.23	3.15	0.94	1.70	1.63	0.94	11.81	13.39	7.44	1.77	1.55	13.0
8-730-26	8-730-26G	1	3.86	3.94	1.02	1.98	2.00	1.06	13.58	15.55	8.50	2.00	1.80	20.2
8-730-28	8-730-28G	1 1/8	4.26	4.06	1.19	2.25	2.20	1.19	15.08	17.40	9.37	2.25	2.05	28.2
8-730-32	8-730-32G	1 1/4	4.72	4.45	1.34	2.53	2.48	1.33	16.50	19.06	10.59	2.48	2.30	39.2
8-730-36	8-730-36G	1 3/8	5.20	5.00	1.38	2.80	2.44	1.45	18.23	21.02	11.69	2.52	2.56	48.0
8-730-38	8-730-38G	1 1/2	5.75	5.51	1.69	3.08	2.52	1.61	19.75	22.88	12.40	3.00	2.81	63.6
8-730-45	8-730-45G	1 3/4	6.75	6.70	2.11	3.39	3.50	1.86	23.00	26.53	14.88	3.50	3.06	96.8
8-730-50	8-730-50G	2	8.00	8.00	2.37	3.94	3.75	2.11	26.88	31.44	16.96	4.00	3.56	160.8

★ S.C. = Self Colored.

Item No.		Rope Size	Before Swage Dimensions (mm)											Max. After Swage Dim.	N.W.
S.C.*	Galvanized	mm	A	B	C	D	D1	d	K	L	L1	W	mm	kg	
8-730-06	8-730-06G	6- 7	38	35	9	13	18	7	102	122	55	17	12	0.3	
8-730-08	8-730-08G	8	45	42	12	20	21	9	135	159	80	20	18	0.6	
8-730-10	8-730-10G	9-10	45	42	12	20	21	10	135	159	80	20	18	0.7	
8-730-11	8-730-11G	11-12	50	50	14	25	25	12	174	199	110	25	23	1.1	
8-730-13	8-730-13G	13	50	50	14	25	25	14	174	199	110	25	23	1.1	
8-730-14	8-730-14G	14-15	57	60	17	32	30	16	210	240	135	31	30	2.4	
8-730-16	8-730-16G	16	57	60	17	32	30	17	210	240	135	31	30	2.3	
8-730-19	8-730-19G	18-20	70	70	20	39	35	21	256	295	161	38	36	4.0	
8-730-22	8-730-22G	22-23	82	80	24	43	41	24	300	340	189	45	40	5.9	
8-730-26	8-730-26G	24-25	98	100	26	50	51	27	345	395	216	50	46	9.1	
8-730-28	8-730-28G	28	108	103	30	57	57	30	383	442	238	57	52	12.8	
8-730-32	8-730-32G	32	120	113	34	64	64	34	419	484	269	63	59	17.8	
8-730-36	8-730-36G	35-36	132	127	35	71	64	37	463	534	297	64	65	21.8	
8-730-38	8-730-38G	38	146	140	43	78	70	41	502	581	315	76	72	28.9	
8-730-45	8-730-45G	44-45	171	170	54	86	89	47	584	674	378	89	78	44.0	
8-730-50	8-730-50G	48-51	203	203	60	100	95	54	682	798	431	101	91	73.1	

★ S.C. = Self Colored.