



DIN 05M

Electronic Dynamometer

Complete group made of load cell and electronic weight indicator. Designed to weigh suspended loads.

CARATTERISTICHE TECNICHE

DIMENSIONS mm

Construction: Aluminium

Load cell safe load limit: 200% of nominal capacity

Breaking load coefficient: > 5

Protection: IP65 (EN 60529)

Working temperature: -5°C ÷ +55°C


Accuracy: ± 0,1% of the nominal load

Power supply: n°3 battery Type "AA" (battery life 180h)

Display indications: 5 digits, stable weight, battery life, measuring unit

Features:

- Digital zero and weight settings;
- Digital filter selection (greater attenuation of weight oscillations)
- Automatic power-off selection
- Peak function and Hold function
- Measuring units selection (kg – N – kN - lb)

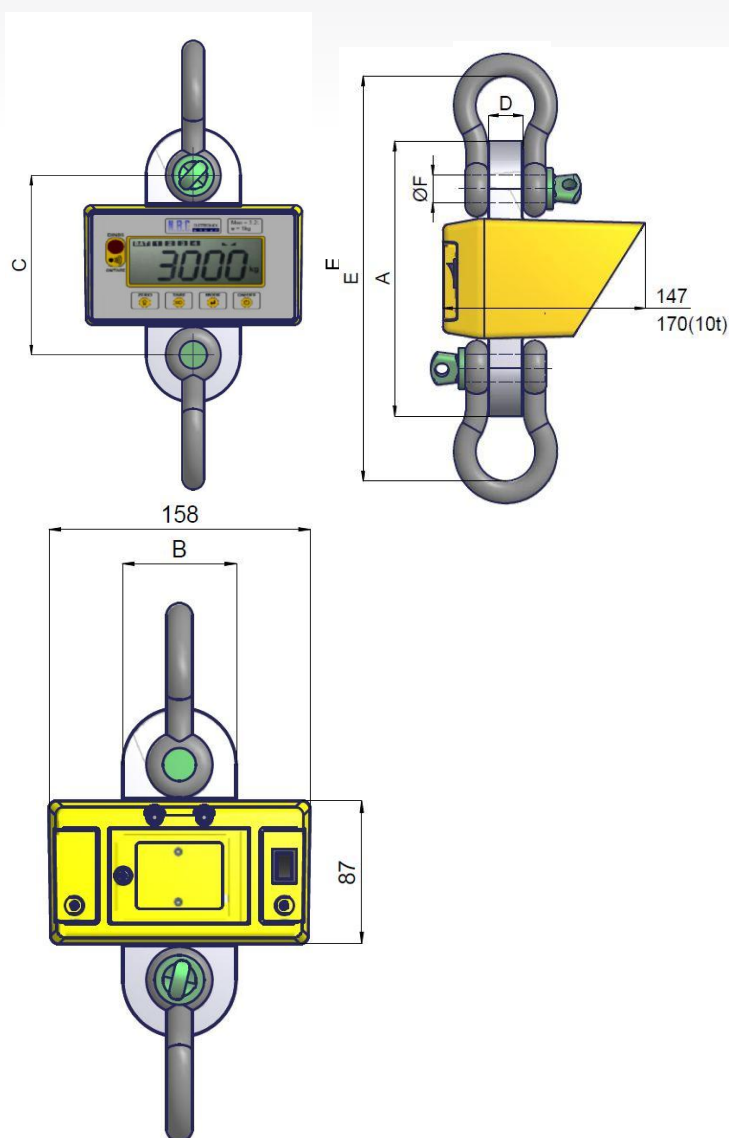

Portata	Divisione	Dimensioni (mm)							Peso
Capacity	Readability	A	B	C	D	E	F		Weight
3,2 t	1 kg	199	69	130	25	269	20		4,2
6,3 t	2 kg	213	69	144	35	348	26		6,5
10 t	5 kg	265	100	181	50	455	36		10,5

Supplied with PVC bag case and shackles (optionals for 10t)