




Brache tonde in Poliestere a norma EN 1492-2

Polyester round slings according to EN 1492-2 standard

Fattore modale
Design factor

Codice Code	Larghezza Width	Lunghezza asole Eyes length	Portata (CMU) (kg) Capacity (WLL) (kg)				
	mm	mm	1	2	1,4	1	0,8
			kg	kg	kg	kg	kg
FT 1	15		1000	2000	1400	1000	800
FT 2	20		2000	4000	2800	2000	1600
FT 3	25		3000	6000	4200	3000	2400
FT 4	30		4000	8000	5600	4000	3200
FT 5	35		5000	10000	7000	5000	4000
FT 6	40		6000	12000	8400	6000	4800
FT 8	45		8000	16000	11200	8000	6400
FT 10	55		10000	20000	14000	10000	8000
FT 12	58		12000	24000	16800	12000	9600
FT 15	60		15000	30000	21000	15000	12000
FT 20	70		20000	40000	28000	20000	16000
FT 25	80		25000	50000	35000	25000	20000
FT 30	90		30000	60000	42000	30000	24000

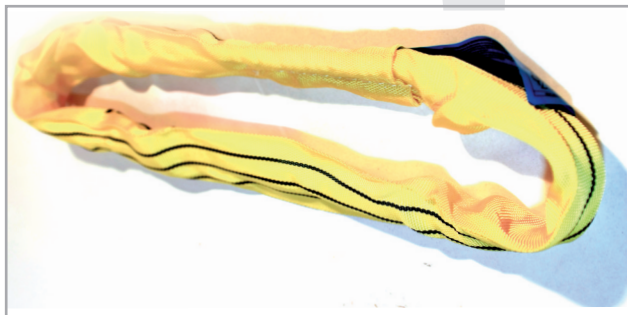

Descrizione

Brache tonde in Poliestere ad alta tenacità, con o senza protezione esterna

Condizioni di impiego

Fattore di rendimento della portata in funzione della temperatura
CMU/ WLL 100%: $-40^{\circ}\text{C} < t \leq +100^{\circ}\text{C}$

Materiale

100% Poliestere ad elevata tenacità

Coefficiente di sicurezza

7:1

Norma di riferimento

EN 1492.2

Certificazione del prodotto

Dichiarazione di conformità "CE" EN 10204 in accordo alla EN 1492.2

*Su richiesta Certificazione e/o collaudo con ente di classifica "IACS" quali RINA - LLOYD'S REGISTER OF SHIPPING - DNV - GERMANISHER LLOYD ed altri

Description

High tenacity polyester round sling with or without external jacket

Use Instructions

Possible reductions of rated load capacity due to temperature exposure
CMU/wLL 100% $-40^{\circ} + 100^{\circ}\text{C}$

Material

100% High tenacity polyester

Safety Factor

7:1

Standard

EN 1492.2

Product Certificate

"EC" Declaration of conformity EN 10204 acc to EN 1492.2

*Upon request Test certificate issue from "IACS" member such RINA - LLOYD'S REGISTER OF SHIPPING - DNV - GERMANISHER LLOYD and others