




Eye Sling Hook. Code "YP"

with Latch

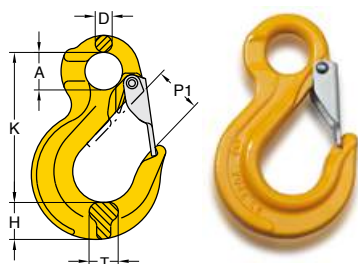

ABS


Type Approval

Item No.	Working Load Limit	For Grade 80 Chain	Dimensions (mm)						N.W.
	tonnes*	mm	A	D	H	K	P1	T	kg
8-044/S-06	1.12	6	20	9	20	80	23	16	0.3
8-044/S-07	2.0	7, 8	25	11	23	98	28	20	0.5
8-044/S-10	3.15	10	32	14	31	121	36	23	1.0
8-044/S-13	5.3	13	40	18	38	152	40	28	1.7
8-044/S-16	8.0	16	50	22	47	184	44	32	3.2
8-044/S-20	12.5	18, 20	60	26	48	218	45	43	5.5
8-044/S-22	15.0	22	50	31	62	244	73	50	9.0
8-044/S-26	21.2	26	64	35	80	279	77	60	13.5
8-044/S-32	31.5	32	88	40	86	352	114	65	20.0

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677


Eye Sling Hook. Code "EL"

with Latch

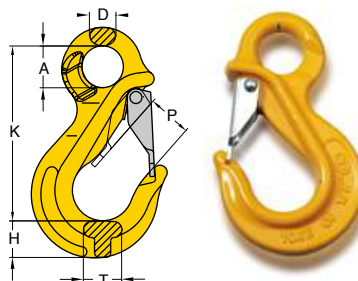


Item No.	Working Load Limit	For Grade 80 Chain	Dimensions (mm)						N.W.
	tonnes*	mm	A	D	H	K	P	T	kg
8-039-06	1.12	6	20	9	19	80	23	16	0.3
8-039-07	2.0	7, 8	26	16	23	109	28	24	0.7
8-039-10	3.15	10	34	19	30	137	33	26	1.2
8-039-13	5.3	13	42	23	37	173	40	35	2.5
8-039-16	8.0	16	52	28	46	185	44	36	3.8

★ Design factor 4:1 proof tested and certified Tested acc. to EN 1677

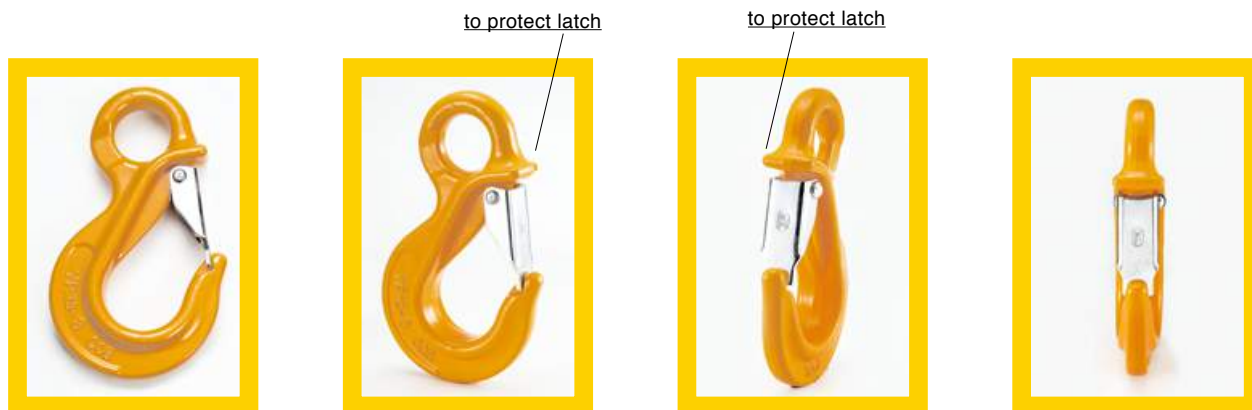

Eye Foundry Hook. Code "YN"

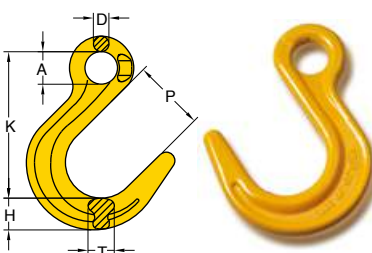

Item No.	Working Load Limit	For Grade 80 Chain	Dimensions (mm)						N.W.
	tonnes*	mm	A	D	H	K	P	T	kg
8-047-07	2.0	7, 8	24	12	30	122	61	20	0.7
8-047-10	3.15	10	31	15	34	150	74	24	1.3
8-047-13	5.3	13	40	20	42	180	88	34	2.3
8-047-16	8.0	16	49	24	50	215	98	43	4.1
8-047-20	12.5	18,20	60	28	57	248	112	46	9.3

★ Design factor 4:1 proof tested and certified
Tested acc. to EN 1677