




SWIVEL HOOKS

**CUSTOMIZATION
UPON REQUEST**

**COMPLETELY
WELDLESS**

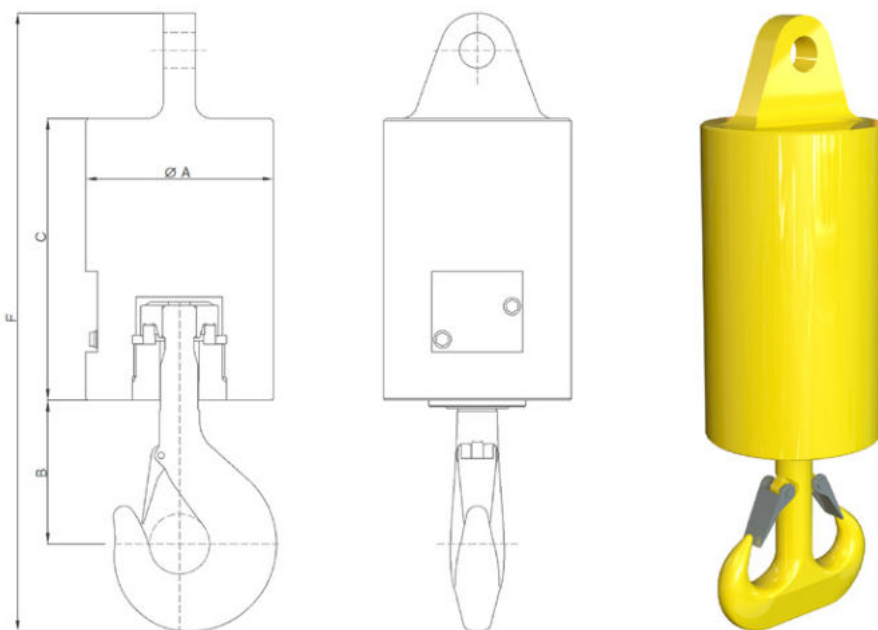

- WLL/SWL: from 50t to 1.500t.
- Hook forged, heat treated and machined, as per DIN15400 design or others upon request.
- Cover: free of weld.
- Material: carbon steel, alloy and super alloy. Most regular super alloy steel.
- Coating Protection: fully painted.
- Safety Factor: 4:1.
- Sealings: for onshore lifting, offshore topsite and subsea lifting & mooring.
- Load Test: requested and recommended.
- Certificate: EN10204-3.1. For 3.2, ILO-3, FAT or Breaking Test available upon request.

SWIVEL HOOKS						
Overall dimensions (mm)						Weight
WLL (t)	Hook No	A	B	C	F	kg
70	25	500	429	600	1624	1000
125	40	600	523	575	1827	1500
150	50	600	570,5	650	1783	1300
200	63	800	648	780	2289	3500
250	80	1000	738	1200	2515	8000
300	100	1000	814	1750	3342	12000
400	125	1000	908,5	1725	3931	12000