




mbouts a chape a sertir en acier inox

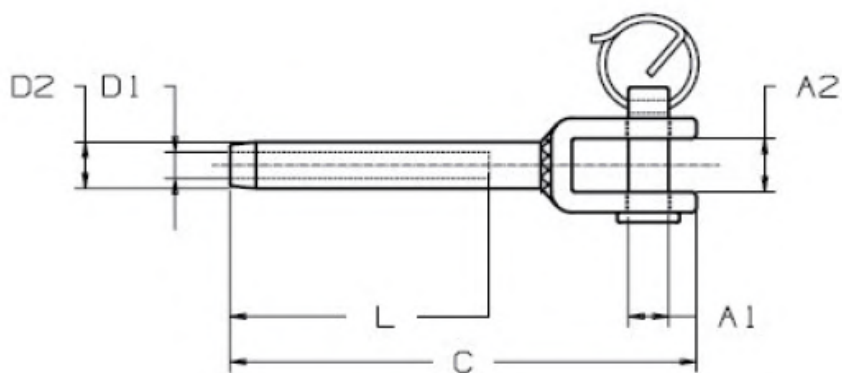

| Fune Ø<br>Rope Ø<br>Cable Ø<br>Drahtseil Ø | D1   | D2   | L   | A1 | A2 | C   | Peso<br>Weight<br>Poids<br>Gewicht |
|--------------------------------------------|------|------|-----|----|----|-----|------------------------------------|
| mm                                         | mm   | mm   | mm  | mm | mm | mm  | Kg                                 |
| 3                                          | 3,2  | 6,3  | 38  | 5  | 7  | 67  | 0,020                              |
| 4                                          | 4,3  | 7,5  | 49  | 6  | 11 | 80  | 0,050                              |
| 5                                          | 5,3  | 9    | 52  | 8  | 12 | 95  | 0,060                              |
| 6                                          | 6,4  | 12,9 | 63  | 9  | 14 | 117 | 0,130                              |
| 7                                          | 7,4  | 14,5 | 72  | 9  | 15 | 130 | 0,130                              |
| 8                                          | 8,4  | 16   | 85  | 12 | 17 | 159 | 0,230                              |
| 10                                         | 10,5 | 18   | 90  | 16 | 20 | 166 | 0,330                              |
| 12                                         | 12,5 | 20   | 105 | 16 | 23 | 213 | 0,520                              |